


6 mm + 12A + 6 mm Insulating Glass Unit (IGU) - Double Glazing

emissivity 0.04, Low E coating on the inner surface of the second pane. The IGU is supported by a stainless steel spacer bar and sealed with a butyl and silicone sealant. The IGU is suitable for use in double glazed windows, doors, and curtain walls.



Key features:

1. Choose Low E coating on the inner surface of the second pane;
2. Low U value (K factor) for better insulation.
3. Suitable for use in double glazed windows, doors, and curtain walls;
4. Suitable for use in double glazed windows, doors, and curtain walls;
5. Keep the IGU clean and free from dust and dirt.

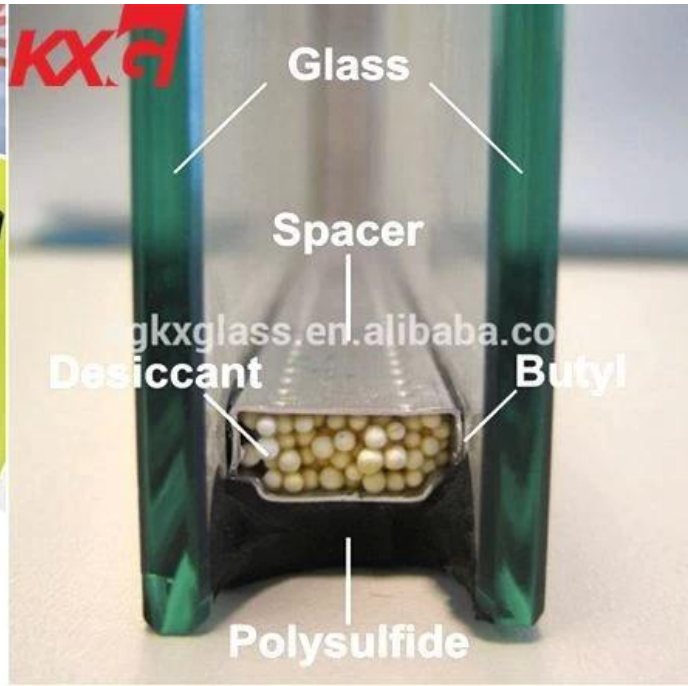

□□□□: -

□□□□□□ □□□: □□□□ □-insulated □□□□□

□□□□ □□□ □□ □ □ □□□□ □ □□□□ □ □□□ □ □□□ □ □□□

Comm on the □□□□: 5 + 9A + 5, 6 + 6A + 6, 6 + 12A + 6, 8 + 12A + 8, 10 + 12A + 10 (□□□□□ □□□□□□ □□□□ □□□□ □□□□)



□□□□□□

□□□□ □□□ □□ □□□□ □□□□ □□□□ □ □□□□ □□□□ □ □□□ □ □□□

