□□ Dongguan

□□□

□□□□□□□□□□□□□□□□ □□□ □ + □ □□ □ □6 □ □□ □ □8 □ □□ □ □□ 10 □□ □□ □□ 12 □□ □□ □□ 15 □□ □□ □□ 19 □□ □; □□□ □ + □ + □ □□ □ □ + □ + □ □□ □ □ + □ + □ □□ □□ □□□□□□□□□□□□□□□□□□

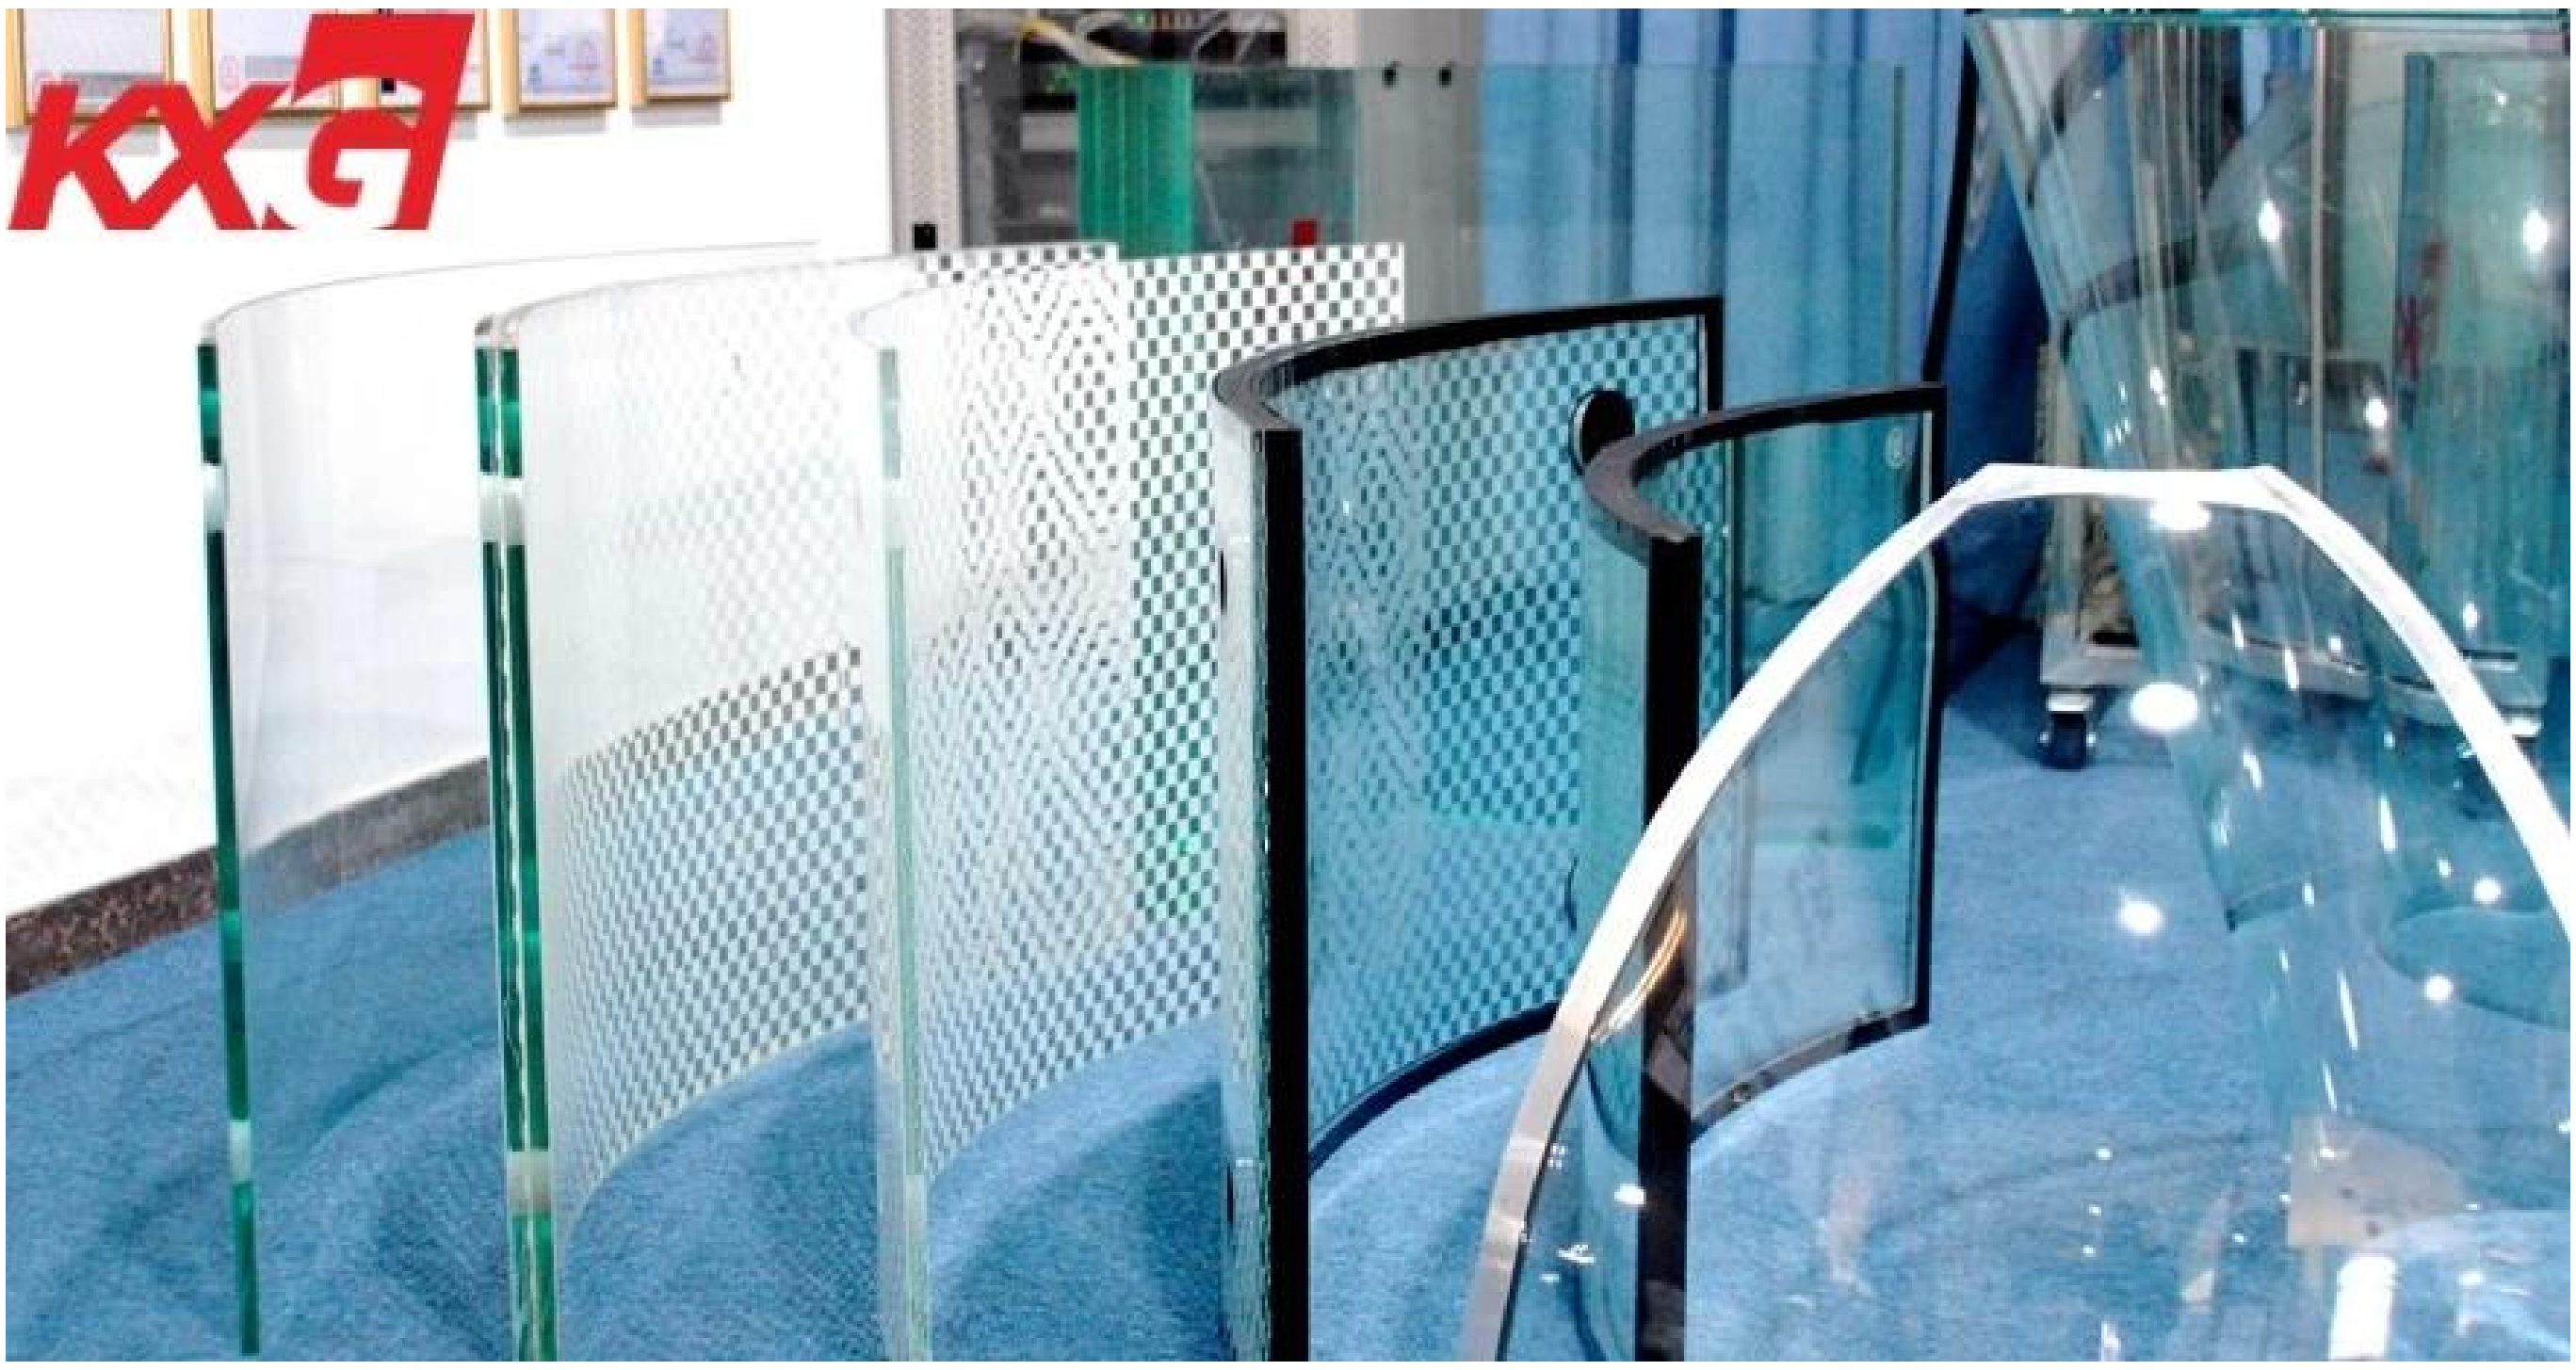

□□□□□□□□□□□□

□. □□□□□□□□□□□□□□□ □□□□□x□□□□□□ □□□□□□□□□□□□□□□□ ≥□□□□□ □□

2. □□□□□ □□□□□ □□□□ □□□□□ □□, □□□≥ □□□□ □□ □

3. □□□□□ □□□□□x□□□□□ □□ □, □□□ ≥□□□□□ □□ □

□. □□□□□ □□□□□x□□□□□ □□ □□□≥ □□□□ □□ □

□. □□□□□□□□□□□□□□□□□□□□□□□□□ □□ □□□□□□□ □□

Products name 产品名称	CurvedTemperedglass 弯钢化玻璃
Thickness 厚度	4-19mm
Maximum size 最大尺寸	2440mmX8000mm
Minimum Radius Range 最小弯钢半径	5-6mm R>=450mm; 8mm-10mm R>=650mm; 12mm-19mm R>=1200
Features 特性	It has same safety and ability of anti-impact with flat tempered glass, but has a higher intensity for the wind pressure and bending than the flat tempered glass.
Certification 认证资质	CCC, ISO, CE, AS/NZS2208

[illegible]

[illegible] [illegible]

[illegible]

1. [illegible]

[illegible]- [illegible] [illegible] [illegible] [illegible] [illegible] [illegible]

[illegible]

[illegible]

5. [illegible] 4 [illegible]

6. [illegible]

[illegible]

[illegible]

[illegible] [illegible] Kunxing [illegible] [illegible]%[illegible]