


10 mm 12 mm toughened


12 mm

12 mm nickel sulphide HST 280 °

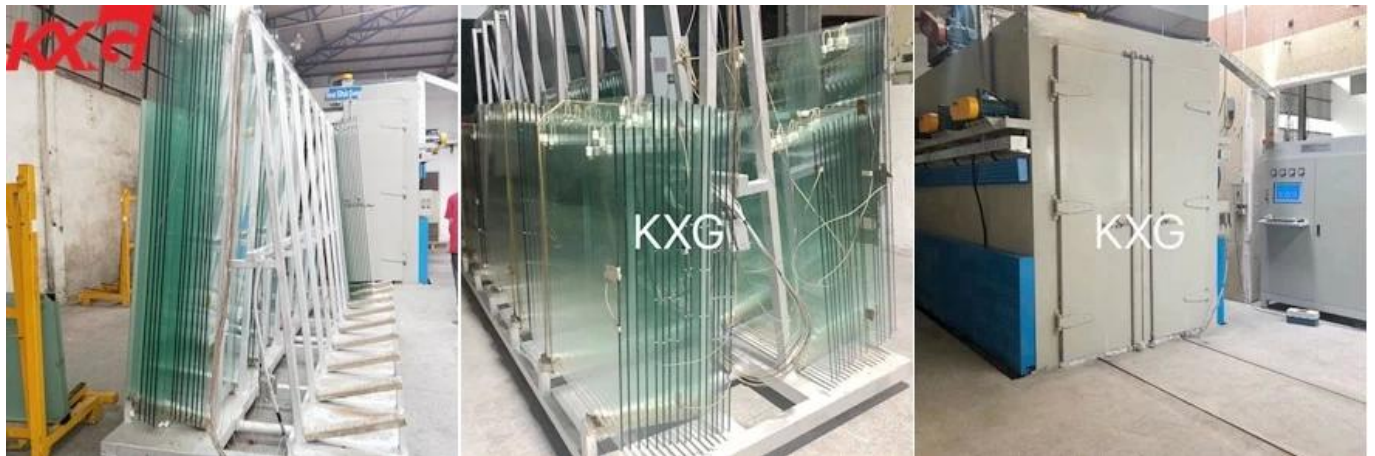

KXG 12 mm

- 1) 3300 * 13000 mm,
2)
3) 12 mm 12 mm 12 mm 12 mm
4) 12 mm
5) CAD AI

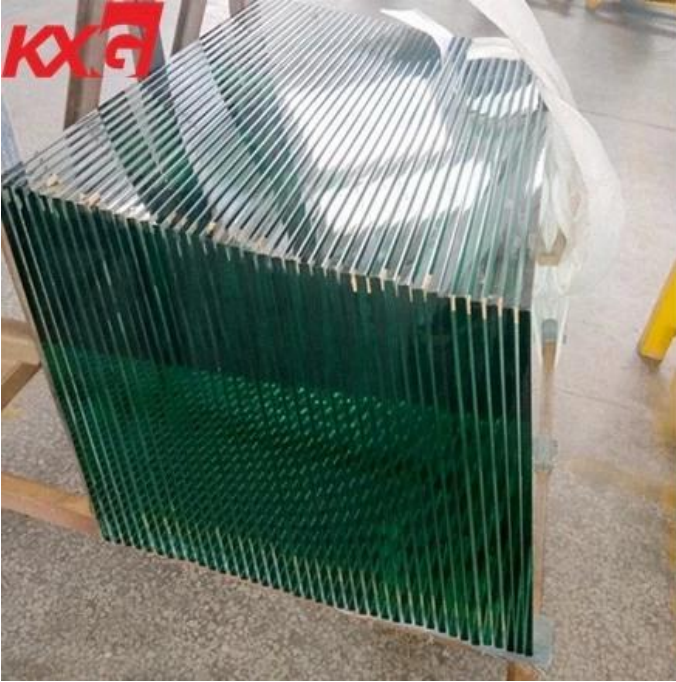

12 mm

12 mm 290 °C± 10 °C

- 12 mm 4-5 harder 12 mm
- 12 mm tempered
- 12 mm UV
- 12 mm toughened, 12 + 12 mm laminated tempered, 12 + 12 mm tempered



KXG reco mm spontaneous facade, balustrades, 12 mm balustrade HST 12 mm 12 mm skylight, balustrade

