

Guangdong

argon
krypton



□ □

[illegible]

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

[illegible]

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □


30 dB;

□ □ □ □ □ □ □ □ □ □ □ □

[illegible]

□ □ □ □ □ □ □ □ □ □ □ □

[illegible]

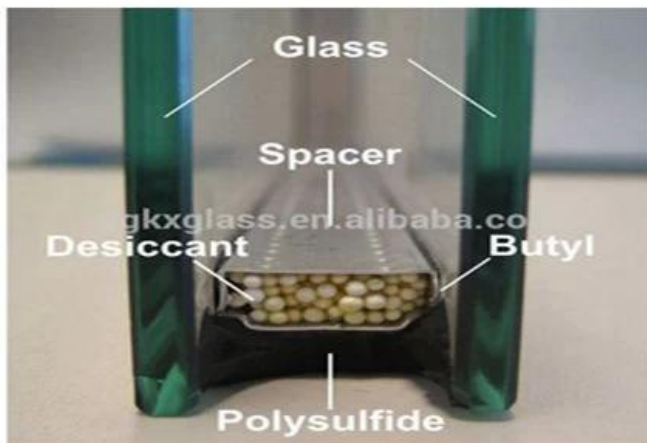

Double Glazing System Components

1. Glass: The outer and inner panes, typically 4mm to 6mm thick.
2. Spacer: The frame that holds the glass panes together, made of aluminum, stainless steel, or composite materials.
3. Desiccant: A drying agent used to absorb moisture from the air space between the glass panes.

Double Glazing System Components:

- Glass: The outer and inner panes, typically 4mm to 6mm thick.
- Spacer: The frame that holds the glass panes together, made of aluminum, stainless steel, or composite materials.
- Desiccant: A drying agent used to absorb moisture from the air space between the glass panes.



XX XXXXX KXG

