

1. 玻璃板与铝型材的连接处，应使用专用的密封胶进行密封，确保密封效果。



2. 玻璃板的厚度应符合设计要求，一般为5mm或6mm。

3. 玻璃板的安装应平整，不得有翘曲、变形等现象。



4. 玻璃板的安装应牢固，不得有松动现象。


[illegible][illegible]

Figure 1. The location of the study area. Wind grid is shown in the figure. The location of the study area is shown in the figure. The location of the study area is shown in the figure.



KXG 000000 000000 000000 0000 000000 000 00 000000 0000 000000, 000 00000000 000000:

00000000 000000 00000000
 0000-000000000 00000000 00000000
 00000000 00000000 00000000
 000000000 00000000 00000000
 000000 00 & 00000000000 00000000 000 00 00000000
 000000 000000000 00000000 / 00000000 00000000 0000000000 00000000

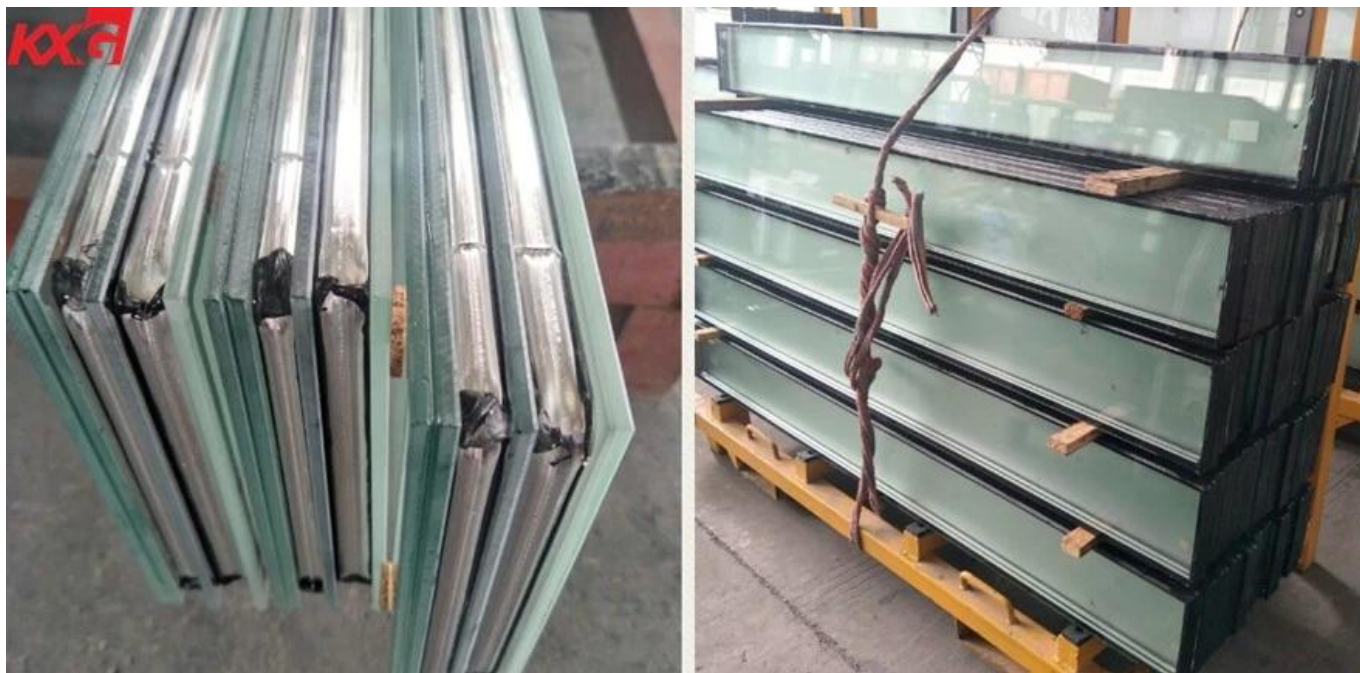

KXG 00000000 00000 000 000000 00000 0000000000 000000 00000000

