

6 mm + 12A + 6 mm Clear Toughened Double Insulating Glass Units China Pabrika



Tungkol sa 6 mm + 12A + 6 mm Clear Tempered Insulated Glass (Double o Triple Glazing Glass)

6 mm + 12A + 6 mm malinaw na tempered insulated glass yunit ay binubuo ng dalawang panels 6 mm na malinaw na salamin na pinaghihiwalay ng isang spacer na aluminyo at tinatakan sa gilid. Ang insulating airspace ay puno ng tuyo na hangin o isang marangal na gas, tulad ng argon o krypton sa loob upang mapabagal ang palitan ng init at mabawasan ang mga antas ng ingay. Ang aluminyo spacer ay puno ng desiccant upang masiguro ang pag-alis ng anumang kahalumigmigan sa air. Ang IGU ay dinisenyo upang panatilihinang mas mainit ang mga tahanan sa taglamig at mas malamig sa su mm er.



6 mm + 12A + 6 mm I-clear ang Tempered Insulated Glass Katangian


A Solution for Solving the Solar Heat Gain Coefficient Dilemma

The solar heat gain coefficient (SHGC) is a number that represents the fraction of solar radiation admitted through a window, both transmitted and absorbed, and subsequently released inward. The lower a window's solar heat gain coefficient, the less solar heat it transmits, which therefore leads to greater shading ability. Climates that rely heavily on air conditioning will benefit from a window product that displays a lower SHGC. As shown, the Solarban 60 unit will outperform the standard clear unit by as much as 49%.


Summer Solar Heat



Standard clear unit
Conventional aluminum spacer
Air Fill
SHGC - 0.75



Solarban 60 unit
Intercept spacer
Argon Gas Fill
SHGC - 0.38

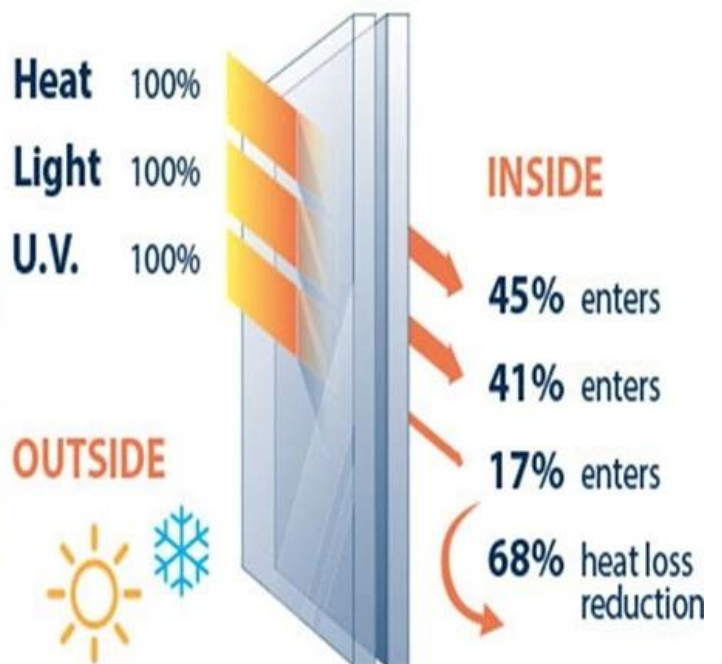

1.Sa mata Pagganap


Ang 6 mm + 12A + 6 mm na malinaw na insulated glass system ay napakataas nakikitang ilaw transmittance, at mababang nakikitang light reflectance;

2.Thermal Pagganap (Heat Proof)

Ang U-halaga ay epektibong binabaan ng mga double glazing unit at maaaring higit pang mabawasan sa pamamagitan ng pagpuno ng mga inert gas tulad ng argon gas;

3.Sound Katunayan


Ang insulated glass ay may magandang sound proof function, maaaring mabawasan ang ingay sa pamamagitan ng higit sa 30 DB;

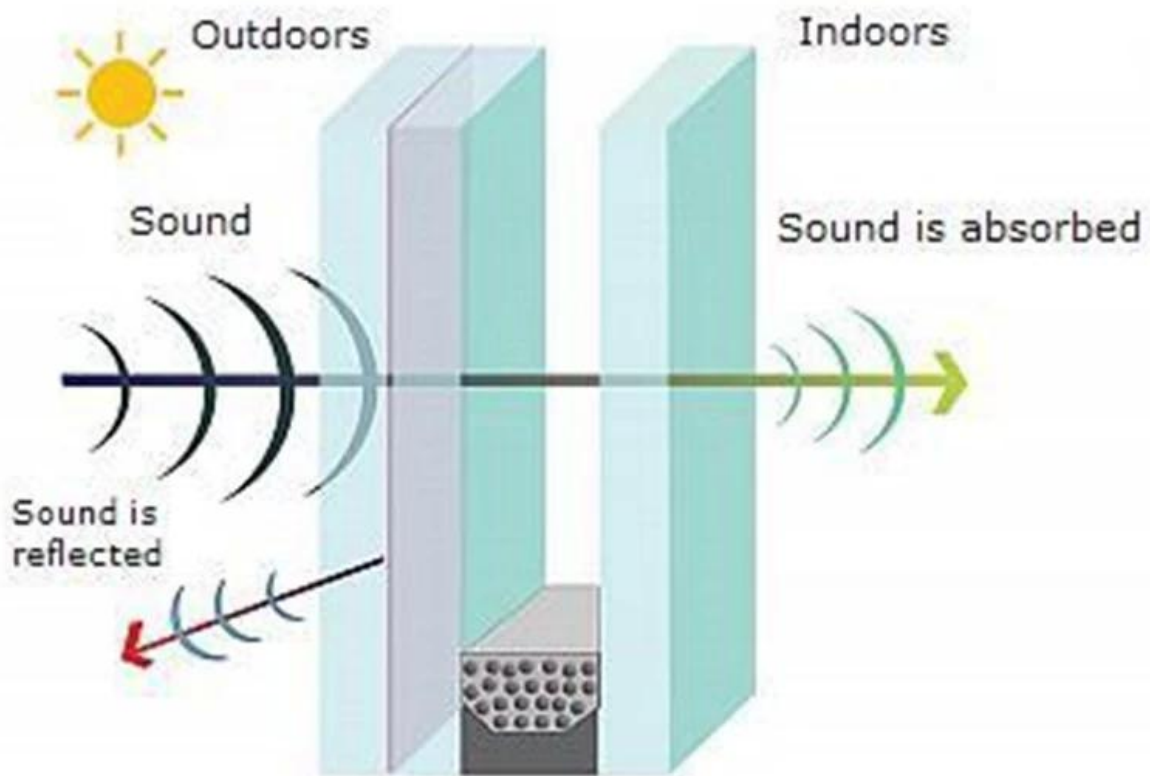

6 mm + 12A + 6 mm I-clear ang Tempered Insulated Glass Application

- Exterior Window Windows at pinto;
- Sa labas ng mga facade at kurtina pader;
- Panloob na partisyon at Freezer;
- Skylight at Greenhouse
- Maraming iba pa.

6 mm + 12A + 6 mm malinaw toughened double glazing salamin bodega

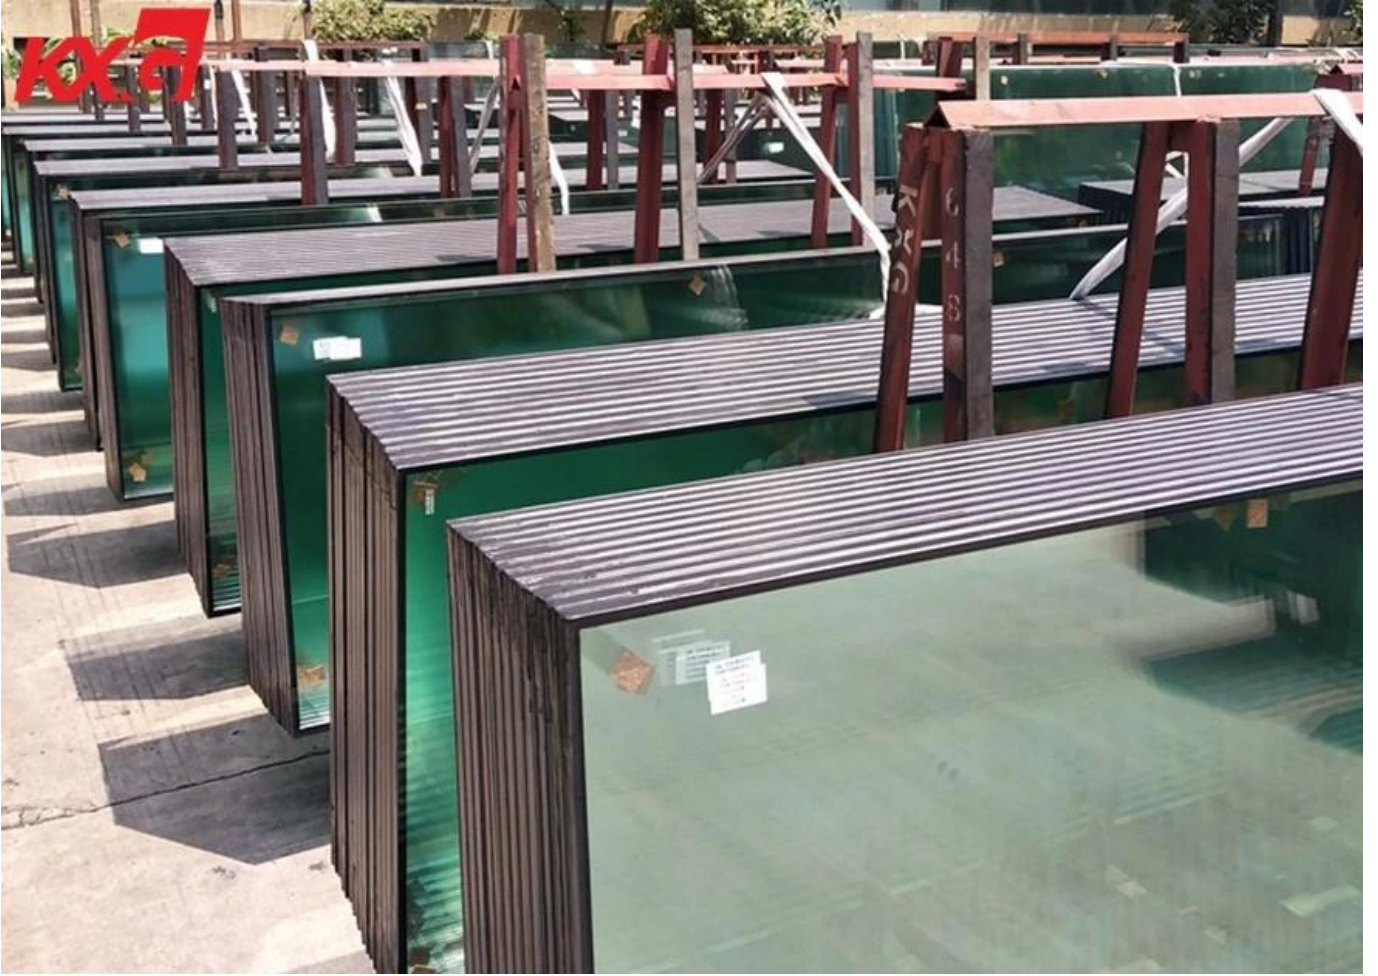

Ang Insulated linya ng KXG Factory ay gumagawa ng 6 + 12A + 6 malinaw na ulo double glass



Ang packaging ng 6 + 12A + 6 malinaw na tempered insulated glass

