

Interior exterior [glass balustrade](#) 8mm 10mm 12mm 15mm curved tempered glass


Curved tempered glass railing has been very popular in commercial application all the time.

[Curved tempered glass](#) is manufactured through the process of heating, curving, and rapidly cooling the glass, which increases its strength by up to 5 times greater than normal float glass.



Curve Tempered Glass Characteristic:

1. In the event of breakage the particles are small and are relatively harmless, more safer than annealed glass.
2. 3-5 times stronger than annealed glass so curved tempered reduces the risk of thermal breakage.
3. All processings (beveling, cutting, drilling, etc.) done on curved tempered glass must be before tempering.

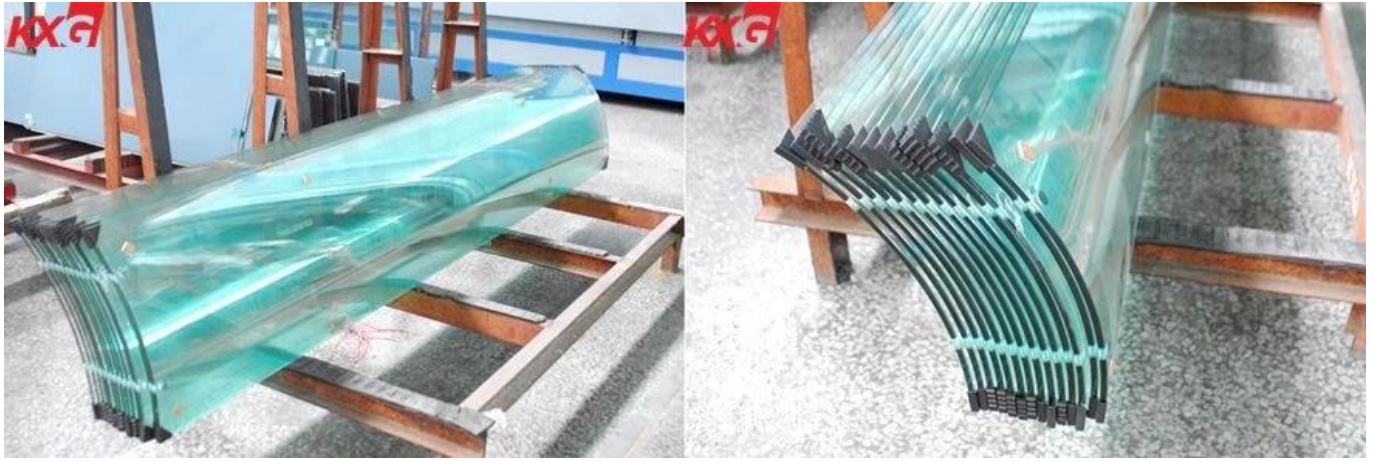

Curve Tempered Glass Specification:

Glass Type	Curved tempered glass
Glass Shape	Curved
Thickness Option	8mm,10mm,12mm,15mm
Max Size	2500*2700mm
Min Radius Range	8-10mm $R \geq 650\text{mm}$ 12-15mm $R \geq 1200\text{mm}$
Certification	CCC, ISO, CE, AS/NZS2208
Features	It has same safety and ability of anti-impact as flat tempered glass, but has a higher intensity for the wind pressure and bending than the flat tempered glass .



[KUNXING GLASS](#) Strong Curved Tempered Glass Packing

