

## Laminated Security Glazing Heat Soaked Test 5mm 6mm 8mm 10mm Tempered Laminated Glass Supplier

### Heat soak test glass


[Heat soak test glass](#) is an additional process that is only applied to tempered glass. After tempering, the temperature rises again, the temperature rises to 280 ° C to 300 ° C, and then naturally cools after heating. If there are impurities, bubbles and other defective items on the glass, all of them will bleed, then after Heat soak test, the glass blew. The rate is almost zero. In short, the Heat soak test glass is a change in the environment of the nickel sulfide inclusions, so that the self-explosion can complete the self-explosion, and the tested glass is safe.



Heat soak testing after tempered glass manufacturing may destroy some defective glass sheets, but this procedure does not guarantee 100% elimination of nickel sulfide inclusions. In addition, the Heat soak process may increase cost, cycle time and scrap rate. Heat soak tempered laminated glass, made of two tempered glass by Heat soak test bonding and sandwich of PVB film or SGP film. It can be flat or curved.

### Tempered laminated glass and tempered safety glass

The [tempered laminated glass](#) is broken safely and may break under the impact of the heavy ball, but the monolithic glass remains intact and the small particles remain adhered to the interlayer film. Tempered glass requires a large impact force to break. Once broken, the entire glass breaks down with numerous fine particles, and only a small amount of broken glass is in the frame.

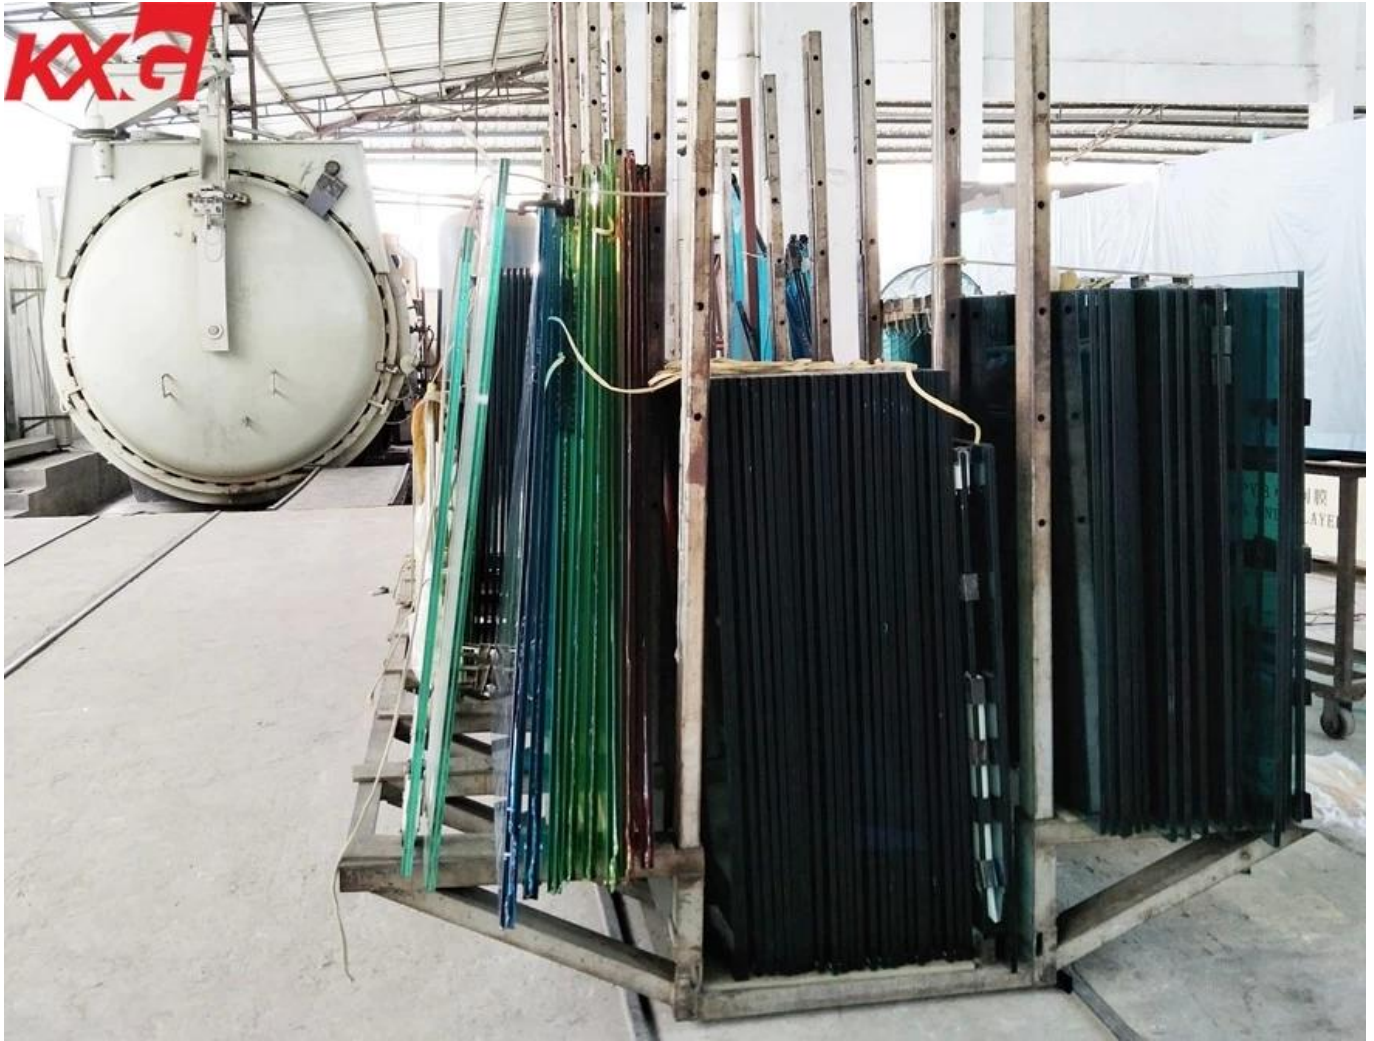

## Features of tempered laminated glass

1. High strength. The impact strength of the tempered glass of the same thickness is 4 to 5 times that of the annealed glass, and the bending strength is 4 to 5 times that of the ordinary glass.
2. Safe. When the glass is destroyed by external forces, the debris becomes small, obtuse-shaped particles, similar to honeycombs, reducing damage to the human body.
3. Thermal stability. [Tempered glass](#) has good thermal stability, can withstand three times the temperature of ordinary glass, and can withstand a temperature difference of 200 °C.

